



## M-CR611 MELODY MEDIA

NETWORK CD RECEIVER WITH AIRPLAY, SPOTIFY,  
DAB/DAB+, BLUETOOTH AND INTERNET RADIO



SLEEK DESIGN – SOUNDS DIVINE

MELODY  
MEDIA



The moment you see the M-CR611 you'll know that this latest incarnation is pure refinement. With a high-gloss jet-black finish and organically curved side panels, the immediate impression is style and elegance. The centre comes in either black or apple white and the front colour illumination can be changed to white, blue, green or orange for a customisable flourish. But the M-CR611 not only looks superb, it's also a superb performer, reproducing excellent CD-audio, FM, DAB/DAB+ and Network files. Designed with ease of use in mind, the Melody Media features a simple "one-push" Wi-Fi connect. New Bluetooth with NFC boasts connectivity options further and iDevices can be hooked up via a front facing USB port, and an extra rear port for convenience. And there are two digital inputs for connection to a TV.

The Melody Media now supports Spotify Connect, as well as a host of other digital media and streaming features. Alongside listening to millions of songs on the world's most popular online music service, it allows playback of music libraries stored on a NAS (Network Attached Storage) or a computer, provide access to thousands of free internet radio stations, and even support Apple AirPlay. Listeners can also take control via an Android and iOS compatible Marantz Hi-Fi Remote app.

An additional new feature is the speaker A / B configuration, allowing individual volume control for A and B, or master volume control for A and B. Use the Melody Media not just to flood one room with music, but two. This is real versatility in elegant housing. The M-CR611 also supports ALAC, as well as 192kHz / 24bit high-resolution WAV, FLAC, AIFF files, 2.8MHz DSD file and Gapless playback.

### Main Features

- 60W x 2ch (6 ohms)
- 4x 30W for speaker A/B with individual volume setting
- Marantz Hi-Fi sound performance
- Plays CD, WMA/MP3 (CD-R/RW)
- DAB/DAB+
- AirPlay on board
- Online Music Service Spotify Connect
- Internet Radio
- Computer/NAS music file streaming (DLNA1.5)
- 2 USB inputs for iPhone/iPod and USB memory play (Front and Rear, Type-A)
- 2 Digital optical inputs for TV or Digital device
- Built in Wi-Fi network module and built in antenna
- Bluetooth with NFC
- Customisable front illumination

### EAN


<b>EU</b>	MCR611/N1B	4951035056509	Black
	MCR611/N1GN	4951035056493	Apple white
<b>UK</b>	MCR611/T1B	4951035056509	Black
	MCR611/N1GN	4951035056493	Apple white

[www.marantz.eu](http://www.marantz.eu)

# because music matters

## M-CR611 MELODY MEDIA

NETWORK CD RECEIVER WITH AIRPLAY, SPOTIFY, DAB/DAB+,  
BLUETOOTH AND INTERNET RADIO

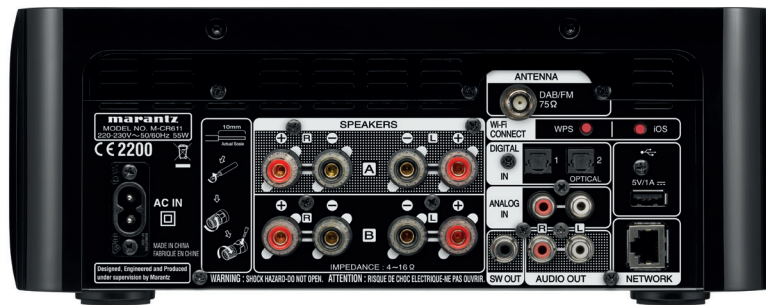

FEATURES	M-CR611
High quality power output	2 x 60 W
CD Compatibility: CD / CD-R/RW / WMA / MP3	• / • / • / •
Tuner: DAB / DAB+ / FM (RDS)	• / • / •
Streaming audio from computer	•
Bluetooth / NFC	• / •
Internet Radio	•
AirPlay audio streaming	•
Windows 8/RT compatible	•
vTuner / Spotify*	• / • (connect)
USB Audio (Front) / Made for iPod / Made for iPhone	• / • / •
USB Audio (Rear) / Made for iPod / Made for iPhone	• / • / •
USB-A: DSD / WAV / FLAC / AIFF / ALAC	2.8 / 192 / 192 / 192 / 96
Ethernet / WiFi	• / •
WiFi setup: WPS / WiFi Sharing	• / •
DLNA certified	• (V1.5)
Lossy formats: MP3 / WMA / AAC	• / • / •
Lossless formats: FLAC HD / ALAC / WAV / AIFF / DSD	192 / 96 / 192 / 192 / 2.8
Gapless Playback	•
WMM (WiFi Multimedia)	•
Remote APP: iDevice / Android	• / •
Tone Control: Bass / Treble / Balance	• / • / •
Low Noise OLED display	3 line
Illuminated front	4 colours selectable + off mode
Clock	•
Sleep Timer	•
Programmable Timer: Once / Daily	• / •

INPUTS/OUTPUTS	
<b>AUDIO</b>	
Analogue In/Out	1
Digital Optical In	2
<b>OTHER</b>	
iPod / iPhone compatible USB input	2
Subwoofer PreOut	•
Main PreOut	AUX assignable
Speaker Terminal: Screw	•
Headphone Out	•
Speaker A / B	• (Individual volume)
Bi-amping	•
Powered multi-room for one extra room	•
<b>SPECIFICATIONS</b>	
<b>AUDIO SECTION</b>	
Power Output (6 ohm, 1kHz)	60 W
Number of channels	2
Freq. Response (Analogue In)	5Hz - 40kHz
Signal to Noise Ratio	90dB
Total Harmonic Distortion	0.1 %
<b>DAB+ SECTION</b>	
Receiving Range (Band III)	•
Signal to Noise Ratio DAB (Mono/Stereo)	95dB
Frequency response DAB	20Hz - 20 kHz
Stereo Separation DAB	90dB
<b>TUNER SECTION FM</b>	
Frequency Range FM	87.5 - 108 MHz
Signal to Noise Ratio (Mono/Stereo) FM	70/70dB
Total Harmonic Distortion (Mono/Stereo) FM	0.3/0.4%
<b>GENERAL</b>	
Available colors: Black / Apple white	• / •
Remote Control	RC013CR
Power Consumption	55 W
Standby Consumption	0.3 W
DAB antenna included	•
Maximum Dimensions (W x D x H) in mm	292 x 305 x 111
Weight	3.4kg

Design and specifications are subject to change by Marantz without notice.

\* not available in all countries

www.marantz.eu

|V01|

because music matters